

Exhaust Hood- 40" Wide



Model # SS-340-E

Product Specifications

HOOD DIMENSIONS

Outer Dimensions.: 24" D x 42" W x 25" H
 Interior Dimensions: 23.5" D x 40" W x 24" H

HOOD MATERIAL

Sides: 0.250" White Acrylic
 Base: 0.500" White High Density Polyethylene
 Top: 0.500" Clear Polycarbonate
 Front: 0.250" Clear Polycarbonate

EXHAUST CONNECTION

6" O.D. Outlet Collar
 Ducting & Fan Not Included with this Product

WEIGHT


Approx. 65 lbs.

MAX. OPERATING TEMPERATURE

Not to exceed 170 degrees Fahrenheit

WARRANTY

Limited two-year warranty from date of shipment on defects due to materials or workmanship.
 PATENT #5,843,197

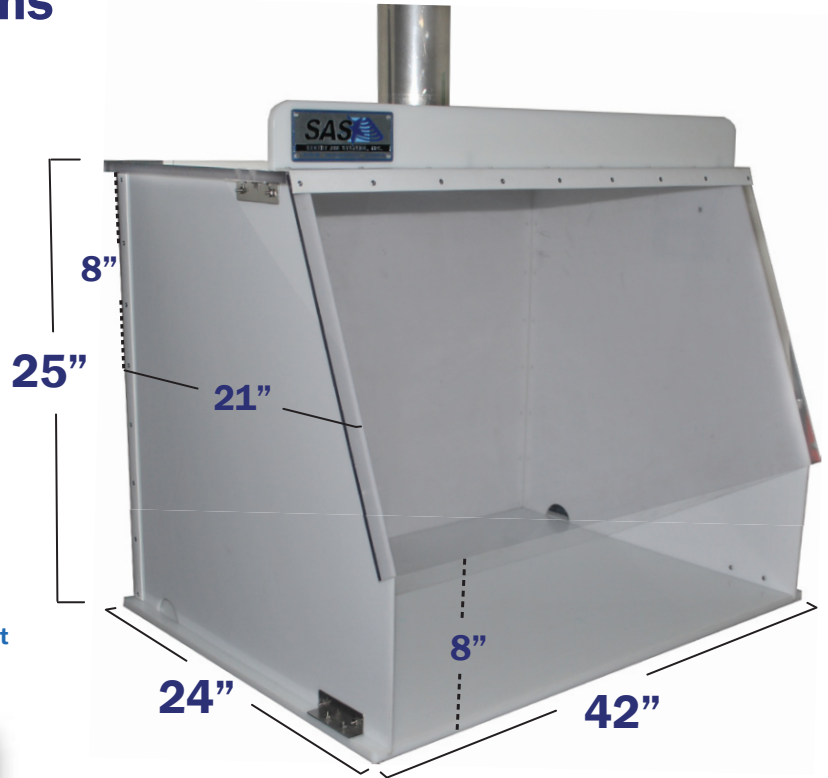

Shown with Outer Dimensions
 Measurements are Approximate



30" Wide Exhaust Hood Pictured Above

Product Features

- 33W Fluorescent Light Included
- Custom Sizes & Configurations Available
- Low Maintenance
- Sturdy Construction
- Other Standard Sizes: 18", 24", 30", 50", 60", 70"
- Attractive Appearance

Sentry Air's **40" Wide Ducted Exhaust Hood** may be an excellent choice for industrial applications that require a compact, exterior-ducting fume hood. This bench-top unit features unique hinged folding side panels, a high-density polyethylene base, a clear polycarbonate top, and a polycarbonate hinged sloping front lid. It is extremely compact and light weight. Typically, exhaust hoods may be used in chemical laboratories- especially those dealing with highly flammable, toxic, or corrosive chemicals, powder and capsule filling facilities, hazardous biological applications, nuclear testing facilities (with radioactive materials), and in a variety of other processes that require fume extraction.

The **40" Wide Ducted Exhaust Hood** can be an effective and economical tool for air quality enhancement in many commercial, chemical, medical, laboratory, and industrial applications.

This unit includes a 6" Outlet Collar and does not include ducting or fan. For additional visibility, a transparent version is available at extra cost.



1-800-799-4609
www.sentryair.com
sales@sentryair.com

