

30" Wide High Flow Industrial Downdraft Bench



Model # SS-430-DDB-HF

The **30" Wide High Flow Industrial Downdraft Bench** effectively captures and extracts fumes, dust, and smoke at the work surface level. This safety engineering control helps protect the operator's breathing zone and surrounding environment from hazardous airborne contaminants. Within the perforated workspace of 30" width by 22" deep, the powerful industrial air cleaner pulls fumes and particulate into the filtration chamber. The **30" Wide High Flow Industrial Downdraft Bench** comes standard with **HEPA filtration** offering up to 99.97% efficiency on particles 0.3 microns and larger. The air cleaner provides up to 950 CFM of air volume. Other filtration options include **ASHRAE filtration** (up to 95% efficiency on particles 0.5 microns and larger) for particulate removal, and heavy-duty **Activated Carbon** and **Specialty Blended Filter Media** (acid gas, ammonia, aldehyde, and mercury) for chemical fume control.

These negative-pressure systems eliminate costly exhaust systems, reduce energy losses, and aid in employee protection by capturing pollutants at the source of emission. Typical applications include: *solvent vapor control, solder fumes, light grinding, epoxy fume control, sanding, buffing, brazing, powder control, and a variety of other industrial applications.*

Sentry Air Systems offers both standard and custom stainless steel downdraft benches equipped to protect employees from breathing harmful particulate and fumes. Downdraft benches are also available with a 40" wide [SS-440-DDB-HF] perforated work area and another 30" wide model with up to 700 CFM air volume [SS-430-DDB]. Custom design options and modifications can be discussed with a Sentry Air Applications Specialist in order to best suit your application.

Product Features

- **Includes:** variable speed controller (115V only), and ON/OFF switch (220V)
- **Optional:** Magnehelic Gauge, air volume downgrade (700 CFM), and 40" wide work area
- **Filter Choice:** HEPA filters, ASHRAE filters, Activated Carbon filters, or specialty blended filter media
- 30" x 22" perforated work area
- Sturdy construction
- Reliable, low maintenance operation
- Low power consumption



30" High Flow Industrial Downdraft Bench




The Industrial Downdraft Bench provides fume extraction for use with chemicals, solvents, and aerosol sprays.



21221 FM 529 Rd, Cypress, TX 77433
1.800.799.4609 • sales@sentryair.com
www.sentryair.com

Fume & Particulate Removal

Product Specifications

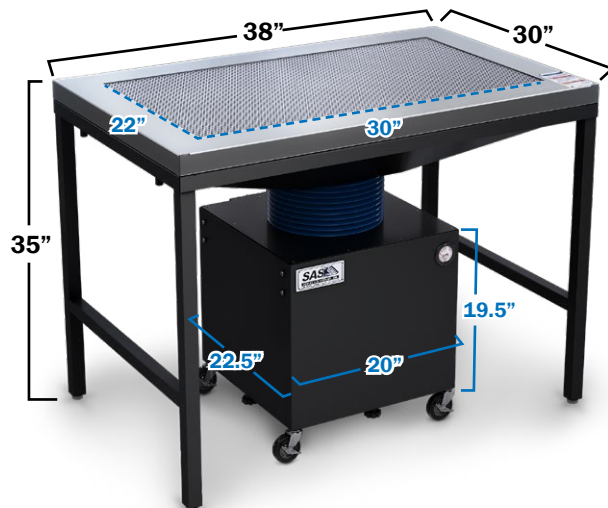

Dimensions are approximate.
Shown with optional Magnehelic
Gauge and 10" D outlet plenum



21221 FM 529 Rd
Cypress, TX 77433
1.800.799.4609
sales@sentryair.com

www.sentryair.com

Table Dimensions	Width: 38" Depth: 30" Height: 35"
Perforated Work Area	1/4" stainless steel perforated area 30" W x 22" D x 16g 51% open space
Table Material	304 stainless steel surface, chrome-plated foot bar
Plenum Box Outlet Options	10" diameter round outlet
Blower Cabinet Dimensions	Width: 20" Depth: 22.5" (includes control box) Height: 19.5"
Blower Cabinet Material	16 ga. carbon steel
Weight (approximately)	150 lbs (depends on filter media installed)
Air Volume (approximately)	High: up to 950 CFM Low: down to 50 CFM
Electrical	115/1/60, 10.7 amps 220/1/50, 5.35 amps 8' grounded power cord with NEMA 5-15P plug
Sound Level (High at 3' from inlet)	Approx. 72 dba
Main Filter Options	Depending on the Application: HEPA [up to 99.97% efficiency on particles 0.3 microns and larger] ASHRAE [up to 95% efficiency on particles 0.5 microns and larger] Activated Carbon Specialty-Blended Filter Media [i.e. acid gas, mercury, aldehyde, and ammonia]
Warranty	Limited two-year warranty from date of shipment on defects due to materials or workmanship.
US Patent	#5,843,197 Pending