

Model 400 Welding Fume Extractor

Model # SS-400-WFE

MADE IN
THE USA



SINCE 1983

The **Model 400 Portable Welding Fume Extractors** are simple and highly efficient source-capture fume extractors for welding fume control. Typical applications include *MIG welding fumes, TIG welding fumes, maintenance welding, stainless steel pipe welding, production welding, clean room welding, occasional stick welding, spot welding, brazing,* and more.

This source-capture welding fume extractor includes a flame-retardant, self-supportive flex arm for easy and varied placement. Other benefits include small footprint, portability handle, heavy-duty casters for easy maneuverability, quick change pre-filter, and a variable speed controller.

The **Model 400 Welding Fume Extractor** comes equipped with patented filtration media that is customized specifically for welding fume control. In most cases, **HEPA** filtration is utilized and offers up to 99.97% efficiency on particles 0.3 microns and larger. Other options include **ASHRAE** [up to 95% efficiency on particles 0.5 microns and larger] and **ULPA** filtration media [up to 99.9995% efficient on particles 0.12 microns and larger].

Portable Welding Fume Extractors are also available in a smaller model [SS-300-WFE] and two larger models [SS-450-WFE & SS-500-WFE-MP1].



Product Features

- Variable speed controller (115V only)
- ON/OFF toggle switch (220V only)
- Portability handle
- Self-supportive, flexible arm
- 360-degree swivel arm
- Quiet, reliable, and low maintenance operation
- Low power consumption
- Long filter life
- Simple quick “no tool” filter change
- **Optional:** Magnehelic Gage, hour counter




21221 FM 529 Rd, Cypress, TX 77433
1.800.799.4609 • sales@sentryair.com

www.sentryair.com

Fume & Particulate Removal

Product Specifications

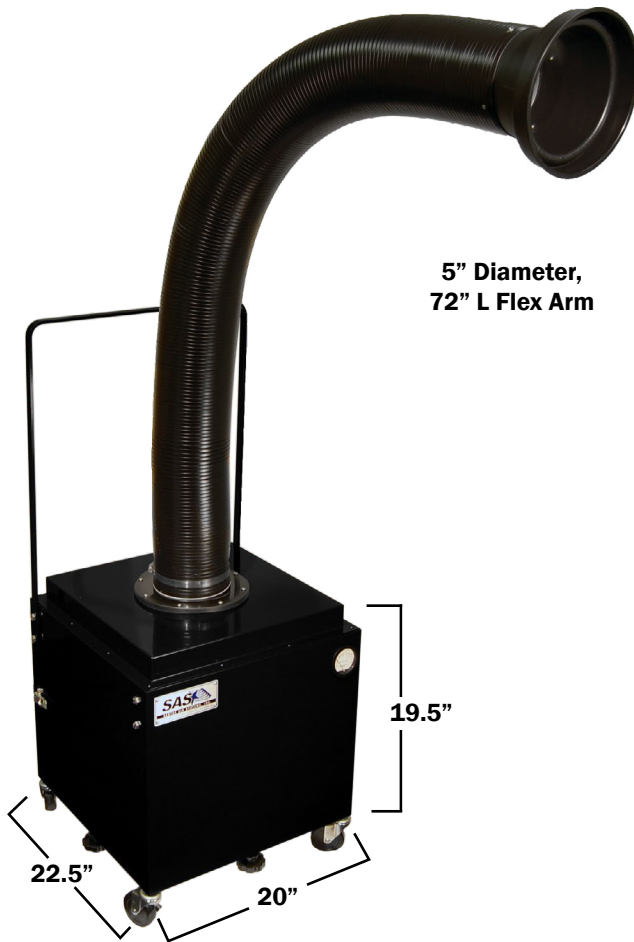

5" Diameter,
72" L Flex Arm

Dimensions are approximate
Shown with optional accessories



21221 FM 529 Rd
Cypress, TX 77433
1.800.799.4609
sales@sentryair.com

www.sentryair.com

Base Unit Dimensions	Length: 22.5" <i>(includes control box)</i> Width: 20" Height: 19.5"
Arm Dimensions	5" Diameter, 72" L fire-retardant flex arm 10.5" diameter capture hood
Cabinet Material	16 Ga. carbon steel
Weight (approximately)	50 - 100 lbs
Air Volume (approximately)	<i>High</i> – 700 CFM <i>Low</i> – 50 CFM
Electrical	115/1/60, 2.5 amps 220/1/50, 1.5 amps 8' grounded power cord with NEMA 5-15P plug
Sound Level (at 3' from inlet)	Approx. 60 dba (High)
Main Filter Options	<i>Depending on the Application:</i> HEPA [up to 99.97% efficiency on particles 0.3 microns and larger] ASHRAE [up to 95% efficiency on particles 0.5 microns and larger] ULPA [up to 99.9995% efficiency on particles 0.12 microns and larger]
Warranty	Limited two-year warranty from date of shipment on defects due to materials or workmanship.
Patent #	5,843,197